

FLOOR STAND DIGITAL SIGNAGE



*The image is for reference only, the actual product shall prevail!

Product Features:


1. 32inch to 65inch available
2. Full HD display, super slim design
3. 3mm tempered glass in front for protection
4. Flexible structure for standalone, android or PC system
5. Support CMS software
6. Wide application for retail signage, shopping malls, hotels, restaurants, etc.

Items	V032FDS01	V043FDS01	V049FDS01	V055FDS01	V065FDS01	V075FDS01	V086FDS01
Display							
Panel Size	32inch	43inch	49/50inch	55inch	65inch	75inch	85inch/86inch
Active Area	697.6845mm(W)×392.256mm(H)	940.24mm(W)×533.26mm(H)	1073.6mm(W)×604.4mm(H)	1209.6mm(W)×680.4mm(H)	1428.48(H) × 803.52(V)mm	1649.66 × 927.936 mm (H×V)	1872(W) × 1053(H) mm
Aspect Ratio	16:9	16:9	16:9	16:9	16:9	16:9	16:9
Contrast Ratio	4000:1	4000:1	4000:1	4000:1	4000:1	4000:1	4000:1
View angle	178°(H/V)	178°(H/V)	178°(H/V)	178°(H/V)	178°(H/V)	178°(H/V)	178°(H/V)
Brightness	300nits	350nits	350nits	350nits	350nits	400nits	450nits
Resolution	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	3840*2160	3840*2160
Panel Life	50000hours	50000hours	50000hours	50000hours	50000hours	50000hours	50000hours
Support Color	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M
Response Time	5ms	8ms	8ms	8ms	8ms	8ms	8ms
Touch parameter (optional)							
Touch technology	IR Touch/ PCAP Touch						
Touch type	10-point high precision						
Touch resolution	32768*32768/ 4096*4096						
Touch accuracy	±2mm (more than 90% touch area)						
Touch Tool	finger,touch pen,soft pen or finger with gloves						
Response Time	<6ms						
Writing Height	<2mm						
Operating system	Windows/Linux/Mac/Android/Chrome						
Android system options							
Android option 1	CPU	RK3288 , quad core, main frequency 1.8GHz					
	RAM+ROM	Standard configuration 2G+8G, optional with 2+16G,4+32G,4+64G;					
	Android system	Android 7.1/Android 10					
Android option 2	CPU	RK3399 , hexa-core, main frequency 2.0GHz					
	RAM+ROM	Standard configuration4G+32G, optional with 4+64G;					
	Android system	Android 7.1/Android 10					
Android option 3	CPU	RK3566 , quad core, main frequency 1.8GHz					
	RAM+ROM	Standard configuration 2G+16G, optional with 4+32G;					
	Android system	Android 11					
Android option 4	CPU	RK3568 , quad-core, main frequency 2.0GHz					
	RAM+ROM	Standard configuration 2G+16G, optional with 4+32G;					
	Android system	Android 11					
Android option 5	CPU	972T , quare core, main frequency 1.9GHz					
	RAM+ROM	Standard configuration 2G+16G, optional with 4+32G;					
	Android system	Android 9.0					
Wireless	WIFI support						
Bluetooth	4.0						
Ethernet	1,10M/100M self-adapting Ethernet						
Ports	2*USB,1*TF, 1*HDMI out, 1*LAN, 1*DC						


Items	V032FDS01	V043FDS01	V049FDS01	V055FDS01	V065FDS01	V075FDS01	V086FDS01
PC system(optional)							
Processor (optional)	i3: i3-3110M/i3-3120M, dual core, frequency 2.4GHZ DDR3 i3-4000M,dual core, frequency 2.4GHZ DDR3 i3-6100U,dual core, frequency 2.3GHZ DDR3/DDR4 i5: i5-3210M/i5-3230M, dual core, frequency 2.5Ghz DDR3 I5-4200M,dual core, frequency 2.5Ghz DDR3 I5-6200U,dual core, frequency 2.5Ghz DDR3/DDR4 i7: i7-4600M,dual core, frequency 2.9Ghz DDR3 Any processor specs. can be customized						
RAM (optional)	4GB/8GB/16GB optional						
Graphics	Intel UHD Graphics 600/630						
SSD/HDD (optional)	128GB/256GB/512GB M.2 SATA SSD						
USB ports	6						
Ethernet port	1*LAN RJ45(Gigabit)						
Wireless	Wifi 802.11 a/b/g/n/ac 2.4GHz and 5GHz						
Bluetooth	optional						
Audio Ports	1*3.5mm line out						
Operation system	Windows 10 pro (trial version unlicensed)						
Audio							
Speaker	2*8 Ω 5W						
Power Supply							
Voltage	AC 110V-240V, 50HZ/60HZ						
Working power consumption	45W	65W	100W	110W	130W	190W	210W
Standby power consumption	0.5W	0.5W	0.5W	0.5W	0.5W	0.5W	0.5W
Environmental							
Operating Temperature	0°C to 40°C (32°F to 104°F)						
Storage Temperature	-15°C to 55°C (-5°F to 131°F)						
Operating Humidity	20% to 80% non-condensing humidity						
Storage Humidity	20% to 90% non-condensing humidity						
Physical specifications							
Panel Dimensions	446*1700*53mm	583*1785*53mm	658*1855*53mm	734*1905*53mm	857*2055*53mm	1005*2000*68.5mm	1154*2100.1*68.5mm
Packed Dimensions	1800*190*600m	1880*190*750m	1910*190*800m	2000*190*890m	2110*200*1000	2199*225*1125	2217*225*1275
	m	m	m	m	mm	mm	mm
Net Weight	32kg	40kg	45kg	65kg	80kg	110kg	130kg
Packed Weight	40kg	48kg	55kg	78kg	100kg	130kg	150kg
Accessories	Power cable 1.5m*1,WIFI antenna*1, key*2, floor stand basement*1, screws*8, screw driver*1						
Certifications	CE FCC ROHS CB						
Warranty	One year						

Technical Drawings:


32inch drawing:

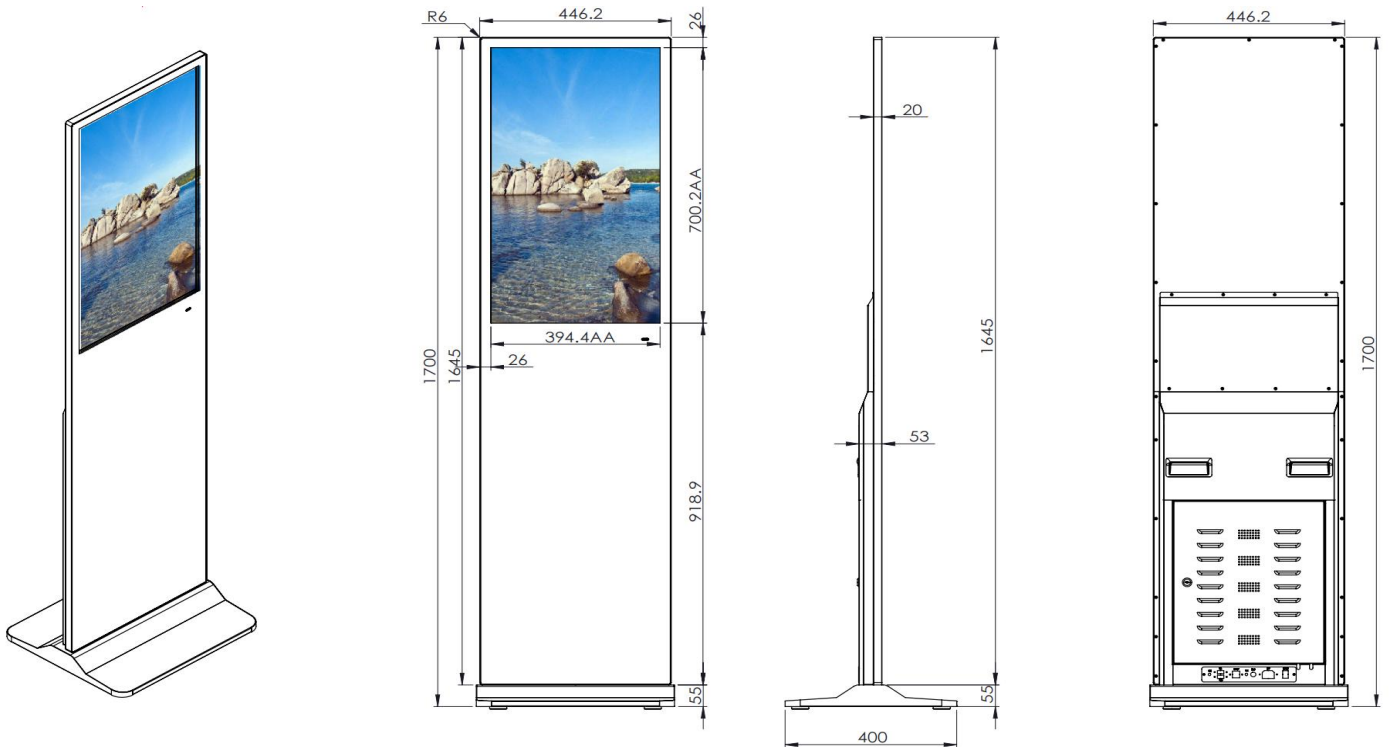


43inch drawing:

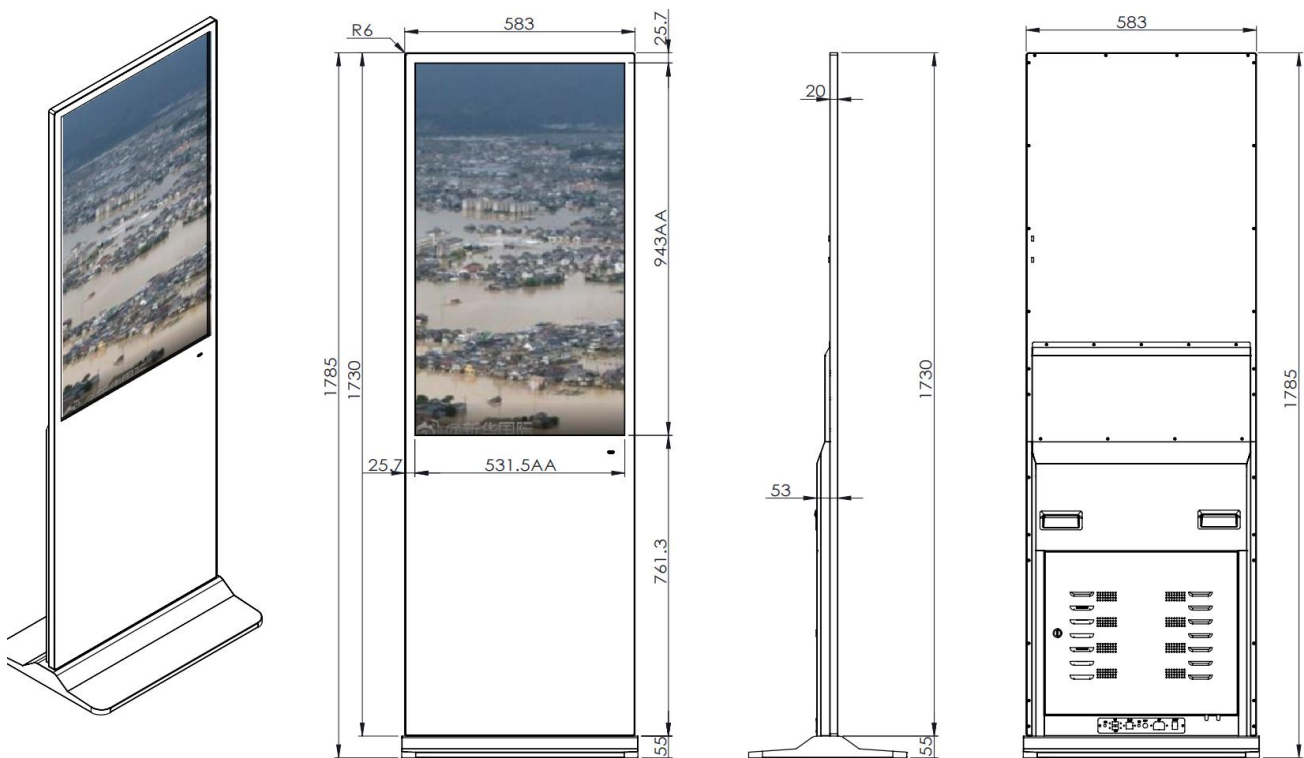


49inch drawing:

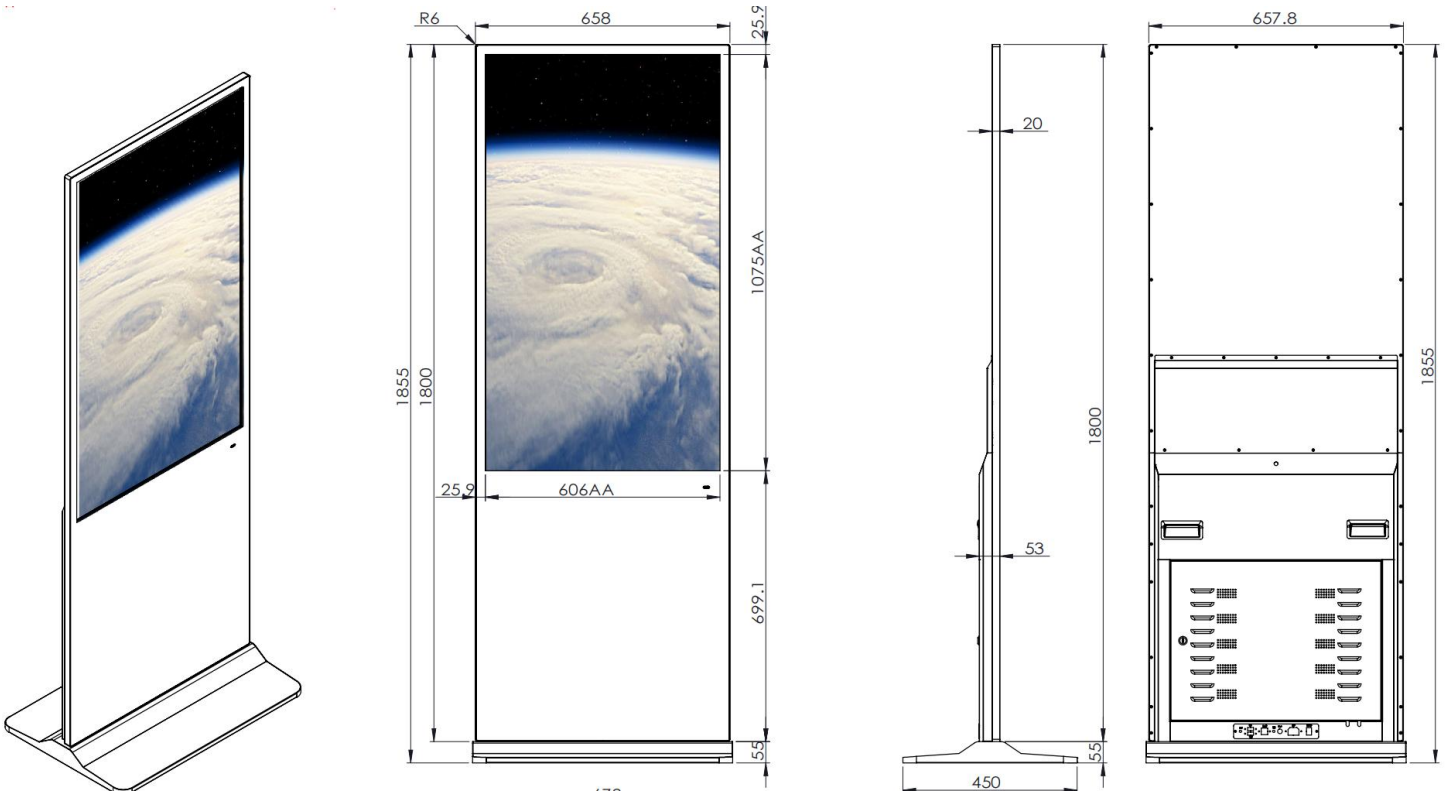


55inch drawing:

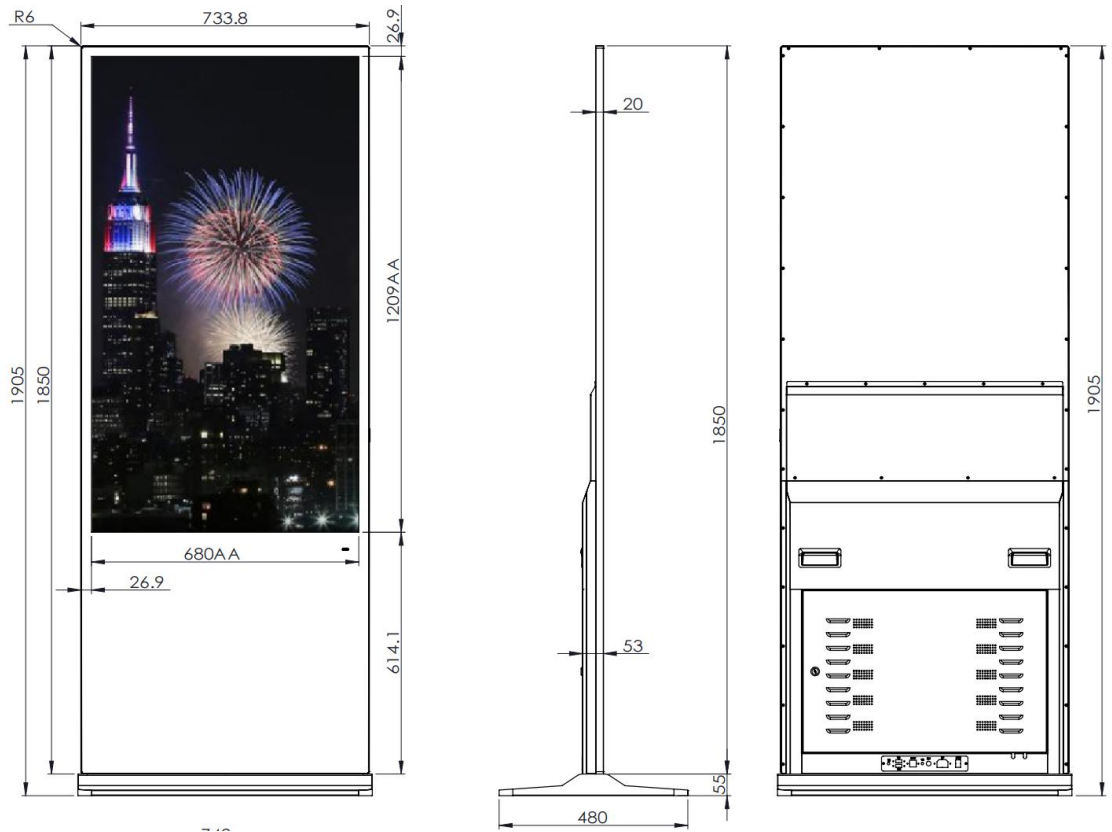


65inch drawing:

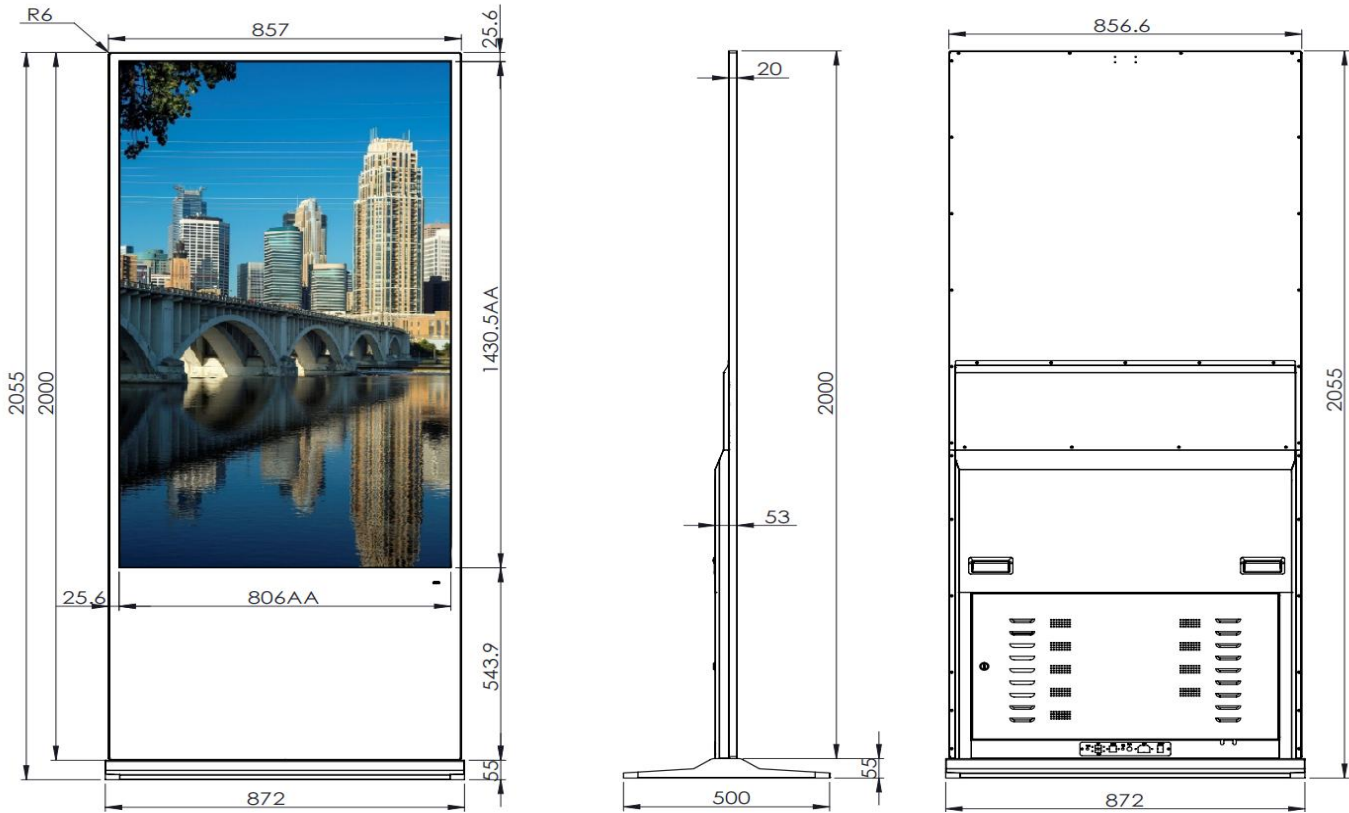

75inch drawing:

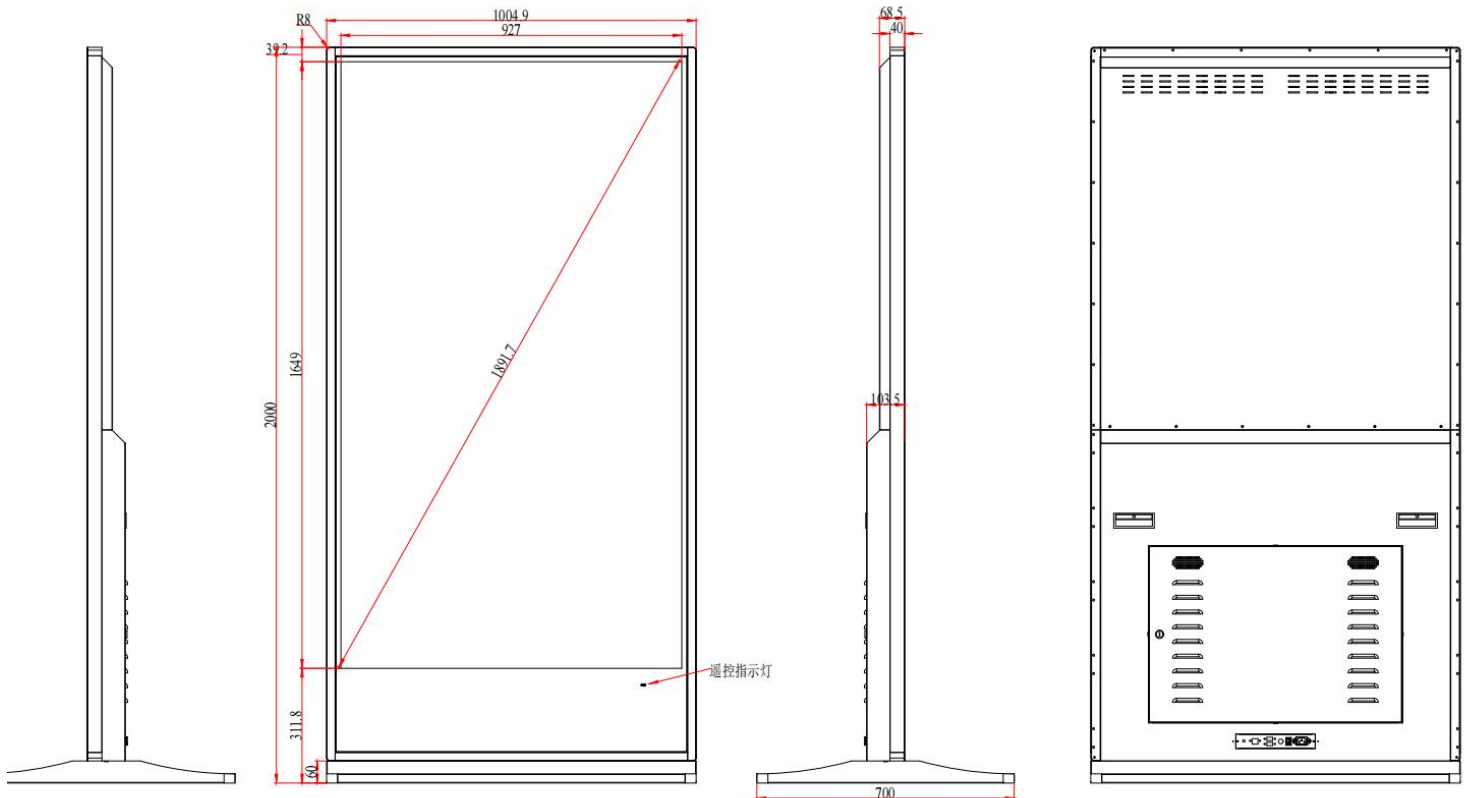

85/86inch drawing:

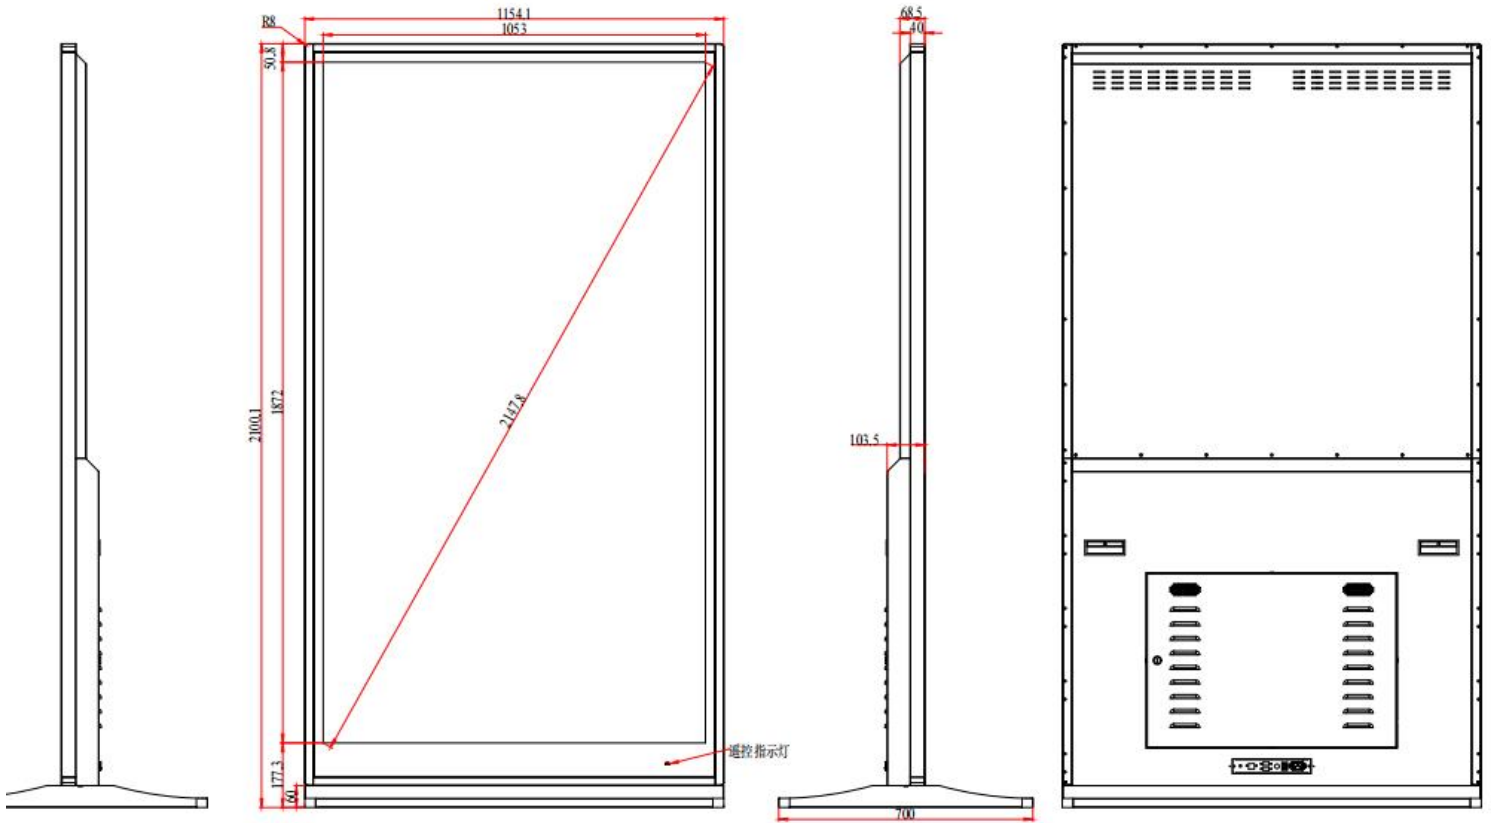

Statement:

The appearance, size and weight may be slight different from the actual product due to the configuration and manufacturing process, and the product images are only used for description. The delivery of the product shall be subject to the specific order details.