


Floor standing Stretched Digital Signage

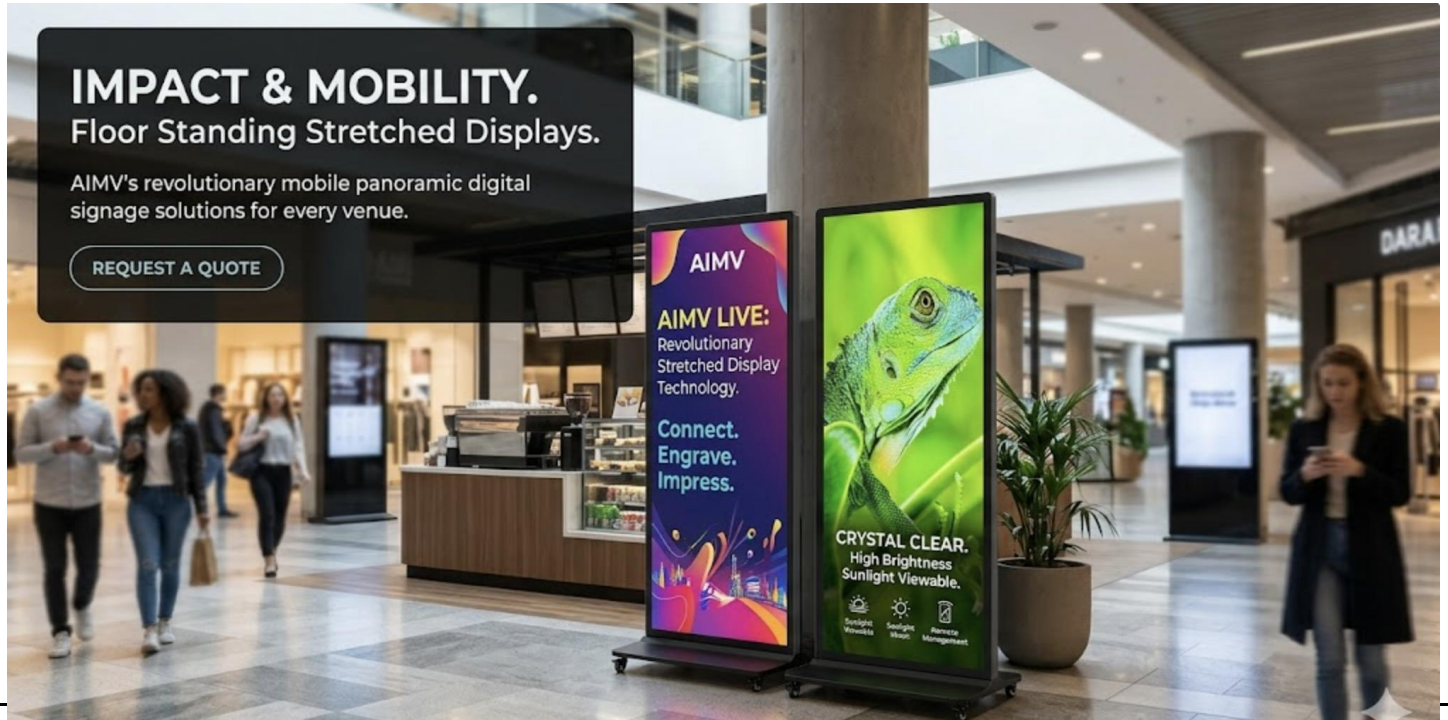

Size	64inch	69inch	70inch	75inch	86inch
Model	V064SFD01	V069SFD01	V070SFD01	V075SFD01	V086SFD01
Outline dims.(L*W*T)	1646*623*38.2mm	1755 x 688 x 38.5mm	1648.48*601*30mm	1787*698*42.5mm	2020*279*75.5mm
Display area	1509*569mm	1636*634mm	1538*541mm	1649.5*618mm	1895*710mm
Resolution	3840*1448	3840*1488	3840*1350	3840*1440	3840*1440
Contrast	4000:1	4000:1	4000:1	4000:1	4000:1
Brightness	400nits	400nits	300~500cd/m ²	300~500cd/m ²	300~500cd/m ²
Viewing angle	H178/V178	H178/V178	178/178	178/178	178/178
Display color	16.7M	16.7M	16.7M	16.7M	16.7M
Service life	>60,000(hrs)	>60,000(hrs)	>60,000(hrs)	>60,000(hrs)	>60,000(hrs)
Power	AC 90-240V	AC 90-240V	AC 90-240V	AC 90-240V	AC 90-240V
Carton size	1890*250*850mm	1780*201*750mm(lcd) 612*67*512mm(stand)	1780*201*750mm(lcd) 612*67*512mm(stand)	1888*250*840mm(lcd) 735*60*515mm(stand)	2120*180*379mm(lcd) 770*60*515mm(stand)
N.W	55kg	45kg	47kg	53kg	66kg
G.W	70kg	53kg	54kg	70kg	73kg
Framework	alluminium+metal	alluminium+metal	alluminium+metal	alluminium+metal	alluminium+metal

Color	black/white	black/white	black/white	black/white	black/white
Mounting	Floor Standign with wheels optional				
Touch parameter(optional)					
Touch technology	PCAP Touch/IR touch				
Touch type	10-point high precision				
Touch resolution	4096*4096				
Touch accuracy	±2mm (more than 90% touch area)				
Touch Tool	finger,touch pen,soft pen or finger with gloves				
Response Time	<6ms				
Writing Height	<2mm				
Operating system	Windows/Linux/Mac/Android/Chrome				
Digital Signage Solutions(HDMI input/ android system/ windows system)					
1. HDMI input option					
NO SYSTEM	standalone version with HDMI input to connect to external PC/media box				
2. Android system options					
Android option 1	CPU	RK3288 , quad core, main frequency 1.8GHz			
	RAM+ROM	Standard configuration 2G+8G, optional with 2+16G,4+32G,4+64G;			
	Android system	Android 7.1/Android 10			
Android option 2	CPU	RK3399 , hexa-core, main frequency 2.0GHz			
	RAM+ROM	Standard configuration4G+32G, optional with 4+64G;			
	Android system	Android 7.1/Android 10			
Android option 3	CPU	RK3566 , quad core, main frequency 1.8GHz			
	RAM+ROM	Standard configuration 2G+16G, optional with 4+32G;			
	Android system	Android 11			
Android option 4	CPU	RK3568 , quad-core, main frequency 2.0GHz			
	RAM+ROM	Standard configuration 2G+16G, optional with 4+32G;			
	Android system	Android 11			
Android option 5	CPU	972T , quare core, main frequency 1.9GHz			
	RAM+ROM	Standard configuration 2G+16G, optional with 4+32G;			
	Android system	Android 9.0			
Wireless	WIFI support				
Bluetooth	4				
Ethernet	1,10M/100M self-adapting Ethernet				
Ports	2*USB,1*TF, 1*HDMI out, 1*LAN, 1*DC				
System language	Chinese (Traditional/Simplified), English, Russian, French, Spanish, Portuguese, Arabic, Italian, Japanese, Korean, Polish, Thai, etc				
3. PC system options					
Processor (optional)	i3: i3-3110M/i3-3120M, dual core, frequency 2.4GHZ DDR3				
	i3-4000M,dual core, frequency 2.4GHZ DDR3				
	i3-6100U,dual core, frequency 2.3GHZ DDR3/DDR4				
	i5: i5-3210M/i5-3230M, dual core, frequency 2.5Ghz DDR3				
	i5-4200M,dual core, frequency 2.5Ghz DDR3				
	i5-6200U,dual core, frequency 2.5Ghz DDR3/DDR4				
	i7: i7-4600M,dual core, frequency 2.9Ghz DDR3				
	Any processor specs. can be customized				

RAM (optional)	4GB/8GB/16GB optional
Graphics	Intel UHD Graphics 600/630
SSD/HDD	128GB/256GB/512GB M.2 SATA SSD
USB ports	6
Ethernet port	1*LAN RJ45(Gigabit)
Wireless	Wifi 802.11 a/b/g/n/ac 2.4GHz and 5GHz
Bluetooth	optional
Audio Ports	1*3.5mm line out
Operation system	Windows 10 pro (trial version unlicensed)
Audio	
Speaker	2*5W 8Ω
Environmental	
Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-15°C to 55°C (-5°F to 131°F)
Operating Humidity	20% to 80% non-condensing humidity
Storage Humidity	20% to 90% non-condensing humidity
Accessories	Power cable 1.5m*1, wall mount bracket*1,Touch USB cable*1(optional), Remote control(optional),wifi antenna(optional)
Certifications	CE FCC ROHS