

## WALL MOUNT DIGITAL SIGNAGE



### Product Features:

1. 32inch to 86inch available
2. Full HD/UHD display, super slim design
3. 3mm tempered glass in front for protection
4. Flexible structure for standalone, android or PC system
5. Support both landscape and portrait wall mounting
6. Wide application for retail signage, kitchen display, shopping malls, hotels, restaurants, etc.

Items	V032WDS01	V043WDS01	V049WDS01	V055WDS01	V065WDS01	V075WDS01	V086WDS01
<b>Display</b>							
Panel Size	32inch	43inch	49/50inch	55inch	65inch	75inch	86inch
Active Area	697.6845mm(W)×392.256mm(H)	940.24mm(W)×533.26mm(H)	1073.6mm(W)×604.4mm(H)	1209.6mm(W)×680.4mm(H)	1428.48(H) X 803.52(V)mm	1649.66 X 927.936 mm(H×V)	1872(W)× 1053(H) mm
Aspect Ratio	16:9	16:9	16:9	16:9	16:9	16:9	16:9
Contrast Ratio	4000:1	4000:1	4000:1	4000:1	4000:1	4000:1	4000:1
View angle	178°(H/V)	178°(H/V)	178°(H/V)	178°(H/V)	178°(H/V)	178°(H/V)	178°(H/V)
Brightness	300nits	350nits	350nits	350nits	350nits	400nits	450nits
Resolution	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	3840*2160	3840*2160
Panel Life	50000hours	50000hours	50000hours	50000hours	50000hours	50000hours	50000hours
Support Color	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M
Response Time	5ms	8ms	8ms	8ms	8ms	8ms	8ms
<b>Touch parameter (optional)</b>							
Touch technology	IR Touch/ PCAP Touch						
Touch type	10-point high precision						
Touch resolution	32768*32768/ 4096*4096						
Touch accuracy	±2mm (more than 90% touch area)						
Touch Tool	finger,touch pen,soft pen or finger with gloves						
Response Time	<6ms						
Writing Height	<2mm						
Operating system	Windows/Linux/Mac/Android/Chrome						
<b>Android system options</b>							
Android option 1	CPU	<b>RK3288</b> , quad core, main frequency 1.8GHz					
	RAM+ROM	Standard configuration 2G+8G, optional with 2+16G,4+32G,4+64G;					
	Android system	Android 7.1/Android 10					
Android option 2	CPU	<b>RK3399</b> , hexa-core, main frequency 2.0GHz					
	RAM+ROM	Standard configuration4G+32G, optional with 4+64G;					
	Android system	Android 7.1/Android 10					
Android option 3	CPU	<b>RK3566</b> , quad core, main frequency 1.8GHz					
	RAM+ROM	Standard configuration 2G+16G, optional with 4+32G;					
	Android system	Android 11					
Android option 4	CPU	<b>RK3568</b> , quad-core, main frequency 2.0GHz					
	RAM+ROM	Standard configuration 2G+16G, optional with 4+32G;					
	Android system	Android 11					
Android option 5	CPU	<b>972T</b> , square core, main frequency 1.9GHz					
	RAM+ROM	Standard configuration 2G+16G, optional with 4+32G;					
	Android system	Android 9.0					
Wireless	WIFI support						
Bluetooth	4.0						
Ethernet	1,10M/100M self-adapting Ethernet						
Ports	2*USB,1*TF, 1*HDMI out, 1*LAN, 1*DC						


# Product Specifications




Items	V032WDS01	V043WDS01	V049WDS01	V055WDS01	V065WDS01	V075WDS01	V086WDS01
<b>PC system(optional)</b>							
Processor (optional)	i3: i3-3110M/i3-3120M, dual core, frequency 2.4GHZ DDR3 i3-4000M,dual core, frequency 2.4GHZ DDR3 i3-6100U,dual core, frequency 2.3GHZ DDR3/DDR4 i5: i5-3210M/i5-3230M, dual core, frequency 2.5Ghz DDR3 I5-4200M,dual core, frequency 2.5Ghz DDR3 I5-6200U,dual core, frequency 2.5Ghz DDR3/DDR4 i7: i7-4600M,dual core, frequency 2.9Ghz DDR3 <b>Any processor specs. can be customized</b>						
RAM (optional)	4GB/8GB/16GB optional						
Graphics	Intel UHD Graphics 600/630						
SSD/HDD (optional)	128GB/256GB/512GB M.2 SATA SSD						
USB ports	6						
Ethernet port	1*LAN RJ45(Gigabit)						
Wireless	Wifi 802.11 a/b/g/n/ac 2.4GHz and 5GHz						
Bluetooth	optional						
Audio Ports	1*3.5mm line out						
Operation system	Windows 10 pro (trial version unlicensed)						
<b>Audio</b>							
Speaker	2*8 Ω 5W						
<b>Power Supply</b>							
Voltage	AC 110V-240V, 50HZ/60HZ						
Working power consumption	45W	65W	100W	110W	130W	190W	210W
Standby power consumption	0.5W	0.5W	0.5W	0.5W	0.5W	0.5W	0.5W
<b>Environmental</b>							
Operating Temperature	0°C to 40°C (32°F to 104°F)						
Storage Temperature	-15°C to 55°C (-5°F to 131°F)						
Operating Humidity	20% to 80% non-condensing humidity						
Storage Humidity	20% to 90% non-condensing humidity						
<b>Physical specifications</b>							
Panel Dimensions	752 * 446 * 63 mm	1127*658*63mm	1263*734*63mm	1482*857*65mm	1692*976*79mm	1953.3x1151.4x92mm	
Packed Dimensions	900*180*600mm	1130*180*720 mm	1280*180*820mm	1380*180*900 mm	1600*190*990m	1805*200*1110 mm	2055*210*1250mm
Net Weight	20kg	25kg	28kg	30kg	40kg	60kg	75kg
Packed Weight	23kg	30kg	35kg	38kg	50kg	70kg	90kg
VESA Mount Dimensions	400×400 mm	400×400mm	400×400m	400×400mm	400×400mm	600*400mm	800*400m
Accessories	Power cable 1.5m*1, Touch USB cable*1(optional), wall mount bracket*1,WIFI antenna*1, key*2						
Certifications	CE FCC ROHS CB						
Warranty	One year						

## Technical Drawings:


### 32inch drawing:

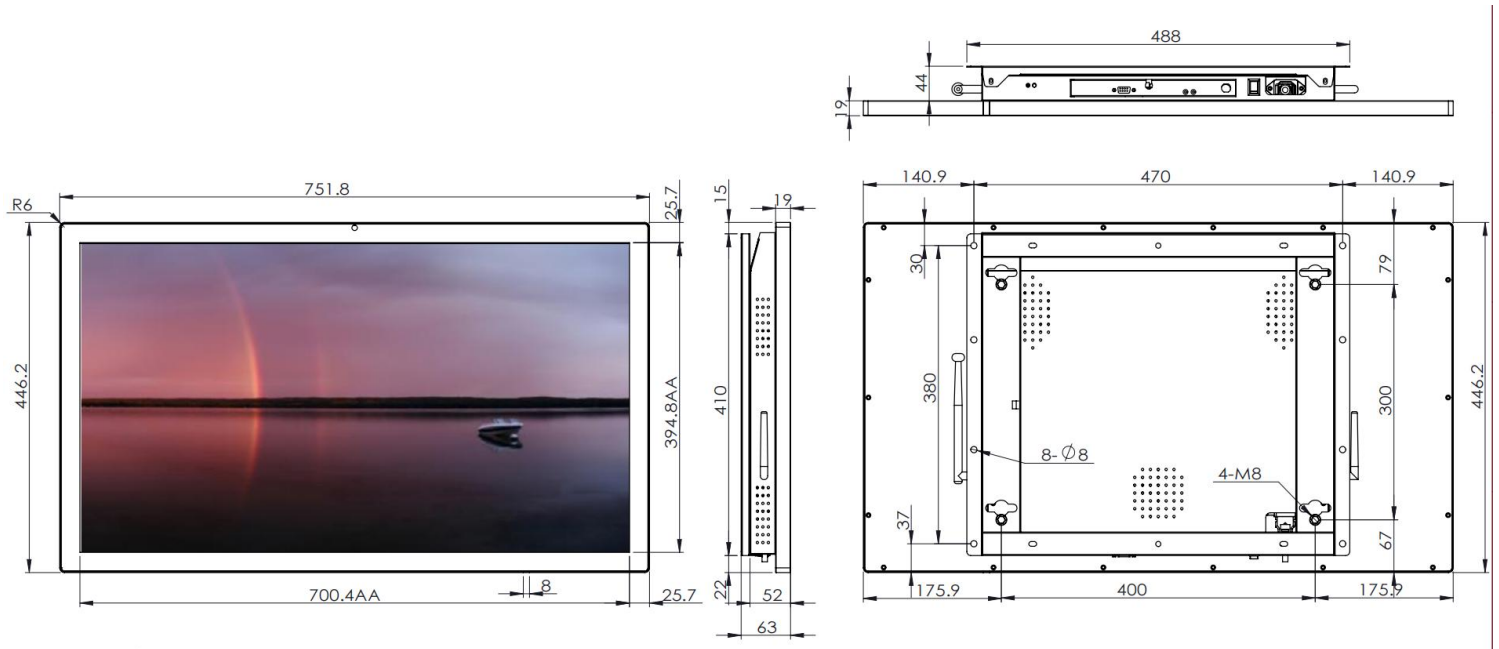


### 43inch drawing:

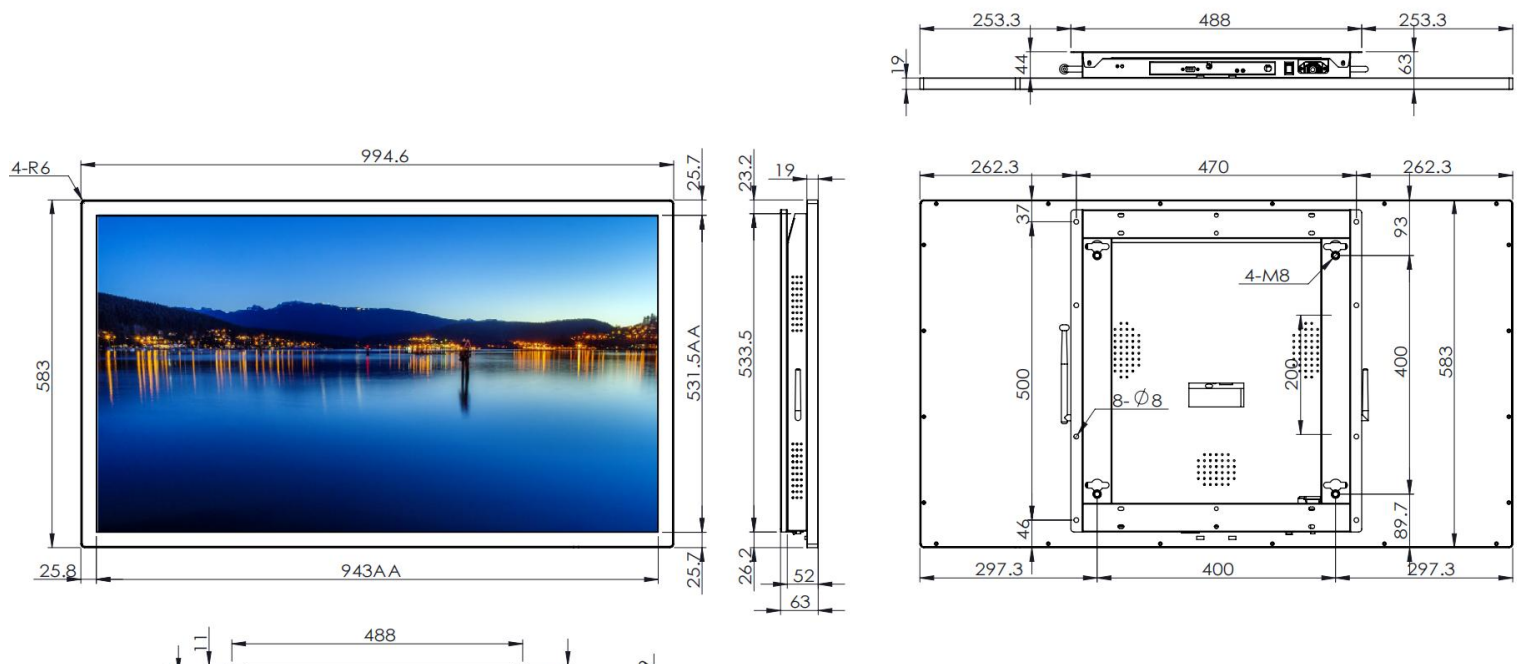

## 49inch drawing:

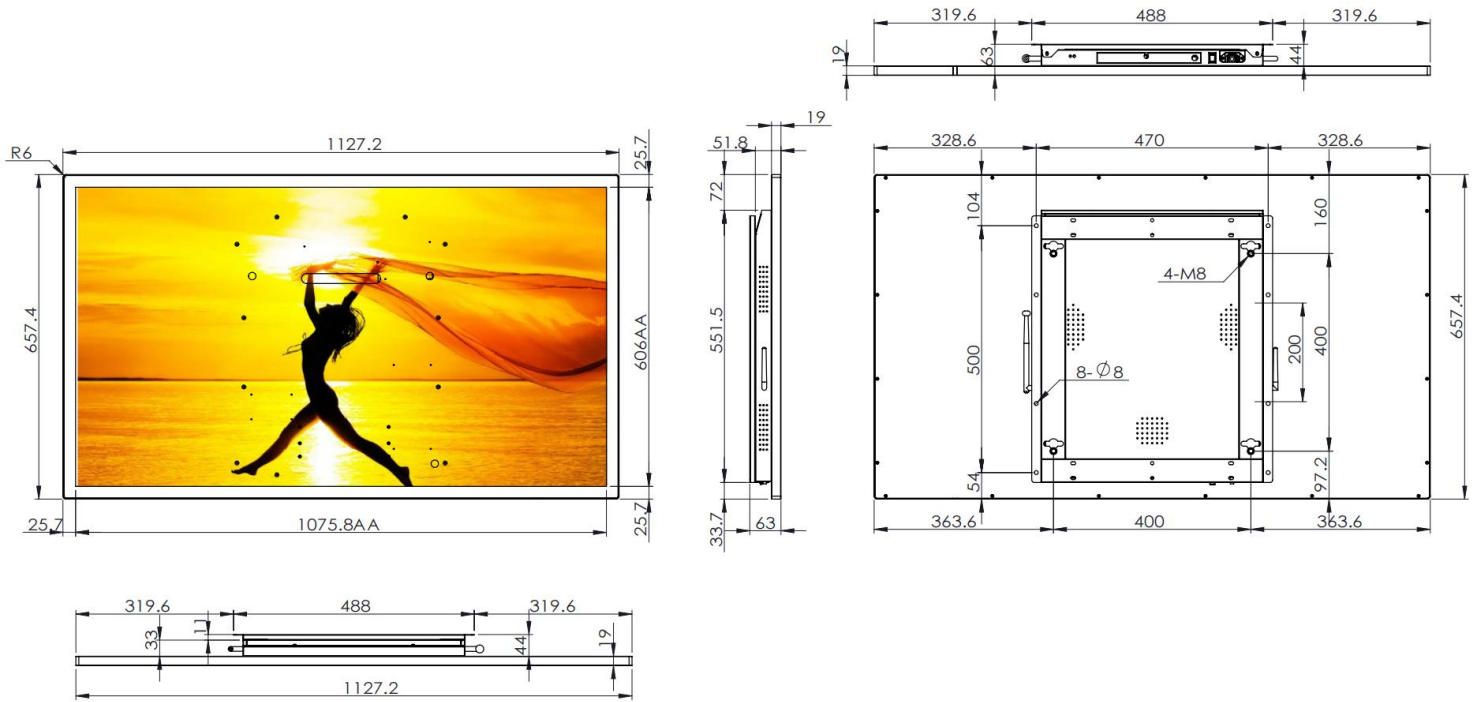

## 55inch drawing:

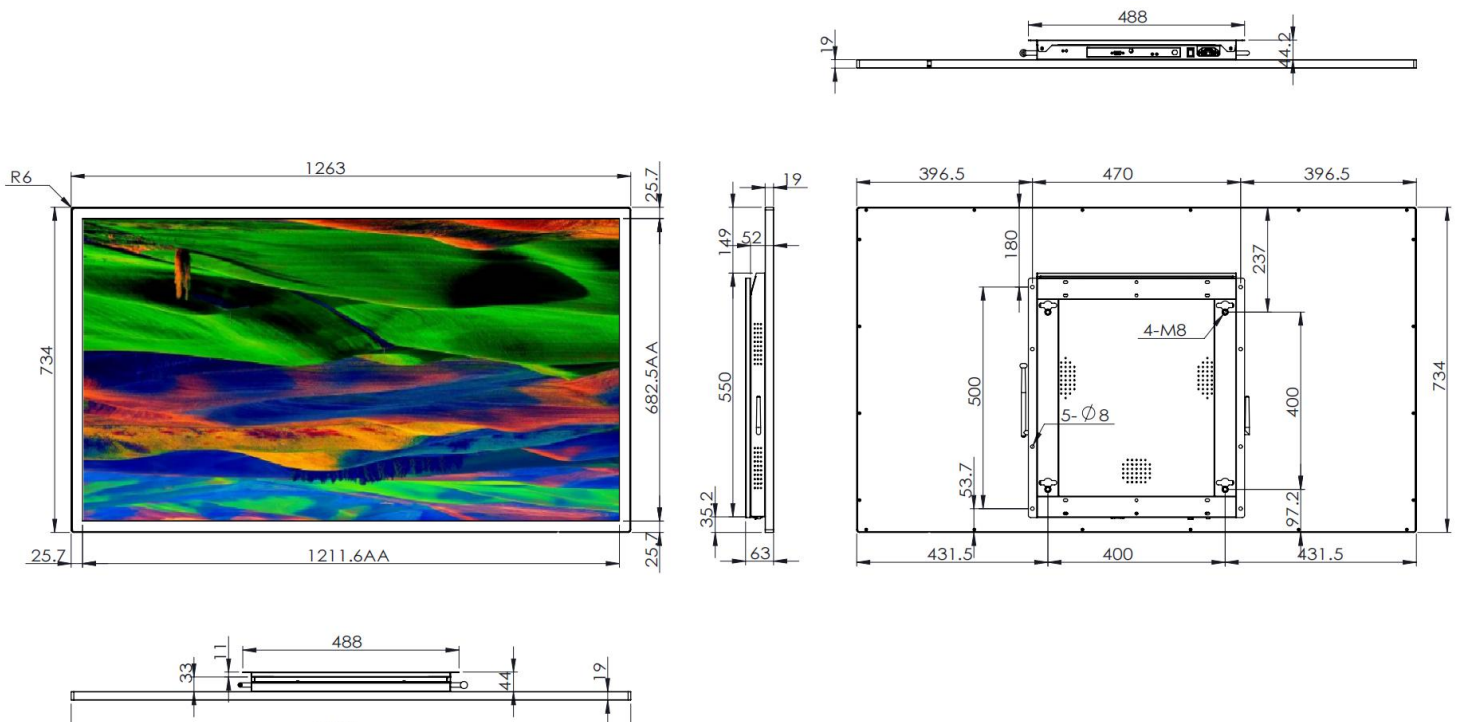

## 65inch drawing:



### Statement:

The appearance, size and weight may be slight different from the actual product due to the configuration and manufacturing process, and the product images are only used for description. The delivery of the product shall be subject to the specific order details.